


ZEBRA MONO

330 - 335W

158.75 mm Cell - 60 Cells

Quality-assured British Brand. Our high Standard Solar panels are distributed across the world.

All our solar panels are made with only Grade A cells for the highest power generation, with the lowest LCOE, come with a minimum of 12 years product warranty and have a lifespan of over 25 years.

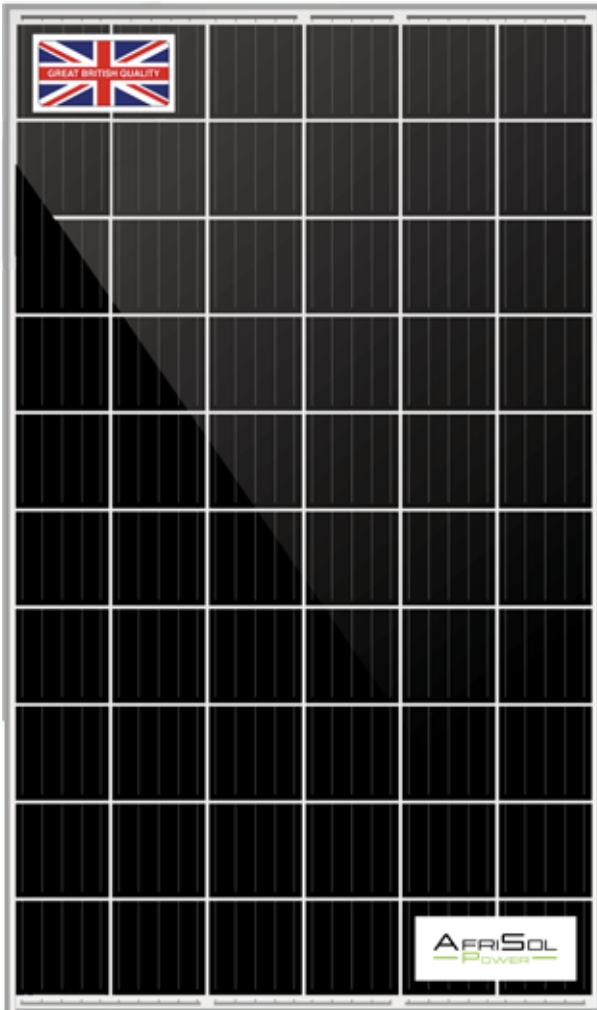


Quality British Brand 

60-Cell
MONOCRYSTALLINE MODULE
20.08%
MAXIMUM EFFICIENCY






0~+5W
POSITIVE POWER TOLERANCE
GRADE A
CELLS GUARANTEED

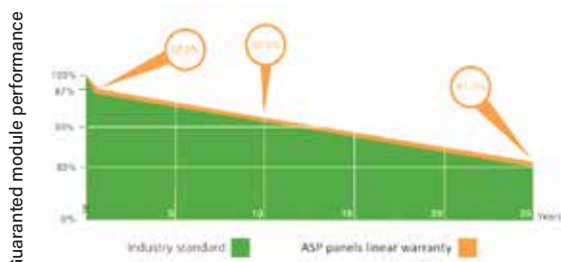LINEAR PERFORMANCE WARRANTY

12 - Year Product Warranty, 25 - Year Linear Power Warranty



KEY FEATURES

-  PERC Cells Technology
-  Lower LCOE and BOS
-  Anti PID / Low LID protection
-  Less Hot Spot Shading effects
-  Lower temperature coefficient



COMPREHENSIVE CERTIFICATES

IEC 61215 / IEC 61701 / UL 61730

ISO 9001 : Quality Management Systems



AfriSol Power Limited

+44(0)3303217774  86 - 90 Paul Street, London EC2A 4NE - United Kingdom  sales@afrisolpower.com

 AfriSolPower  afrisolpower  AfriSolPower  www.afrisolpower.com



ELECTRICAL DATA AT STC*

Power output (Pmax)	330 W	335 W
Power tolerance	0~+5 W	0~+5 W
Module efficiency	19.78 %	20.08 %
Maximum power voltage (Vmp)	33.54 V	33.74 V
Maximum power current (Imp)	9.84 A	9.93 A
Open circuit voltage (Voc)	40.80 V	41.04 V
Short circuit current (Isc)	10.25 A	10.35 A

*Standard Test Conditions: Irradiance: 1 000 W / m² • Cell temperature: 25°C • AM: 1.5

ELECTRICAL DATA AT NMOT*

Power output (Pmax)	246.06 W	249.79 W
Maximum power voltage (Vmp)	31.44 V	31.63 V
Maximum power current (Imp)	7.81 A	7.89 A
Open circuit voltage (Voc)	37.84 V	38.06 V
Short circuit current (Isc)	8.33 A	8.41 A

*Nominal Operating Cell Temperature: Irradiance: 800 W / m² • Ambient temperature: 20°C • AM: 1.5 • Wind speed: 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline (158.75x158.75 mm)
Number of cells	60
Dimensions	1665x1002x35mm
Weight	18.9 kg
Glass	3.2 mm tempered glass, High transmission (>94%), Anti-Reflective Coating
Frame	Anodized aluminium alloy
Junction box	IP68
Cable	4mm ² , 900mm (+) 900mm (-); Length can be customized
Connector	MC4 or MC4 compatible
Max front load (e.g.: snow)	5400 Pa
Max back load (e.g.: wind)	2400 Pa

TEMPERATURE CHARACTERISTICS

NOCT	45 °C ±2 °C
Temperature coefficient of Pmax	-0.396%/°C
Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	+0.06%/°C


MAXIMUM RATINGS

Operating temperature range	-45 °C ~+85 °C
Maximum system voltage	1500V/DC(IEC) 1500V/DC(UL)
Max series fuse rating	25 A

PACKAGING (1665x1002x35mm)

Type	Pcs	Weight
Per pallet	31 pcs	590 kg
40ft HQ Container	924 pcs	17.59 t

I-V CURVES

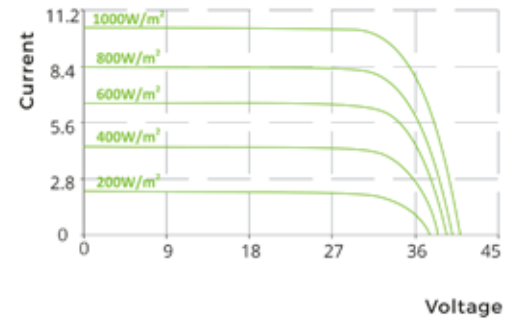

Dimension of PV Module (mm)

