




**Quality British Brand** 

**144-Cell**  
MONOCRYSTALLINE MODULE  
**21.28%**  
MAXIMUM EFFICIENCY

**0~+5W**  
POSITIVE POWER TOLERANCE  
**GRADE A**  
CELLS GUARANTEED

### LINEAR PERFORMANCE WARRANTY

12 - Year Product Warranty, 25 - Year Linear Power Warranty

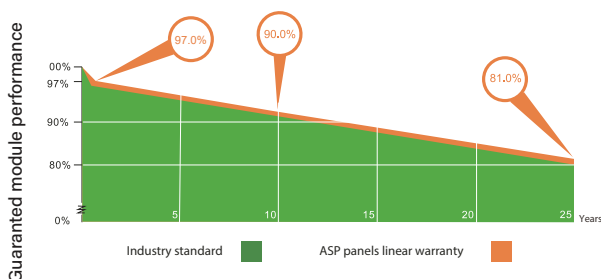

# EAGLE MONO






## 530-550W

**M10 / 182 mm Cell - 144 Half-cell**

Quality-assured British Brand. Our high Standard Solar panels are distributed across the world.

All our solar panels are made with only Grade A cells for the highest power generation, with the lowest LCOE, come with a minimum of 12 years product warranty and have a lifespan of over 25 years.

### KEY FEATURES

-  PERC Cells Technology
-  Lower LCOE and BOS
-  Anti PID / Low LID protection
-  Less Hot Spot Shading effects
-  Lower temperature coefficient



### COMPREHENSIVE CERTIFICATES

IEC 61215 / IEC 61701 / UL 61730

ISO 9001 : Quality Management Systems



### AfriSol Power Limited

+44(0)3303217774  86 - 90 Paul Street, London EC2A 4NE - United Kingdom  sales@afrisolpower.com

Ver ASP/03-22

 AfriSolPower  afrisolpower  AfriSolPower  www.afrisolpower.com



## ELECTRICAL DATA AT STC\*

Power output (Pmax)	530 W	535 W	540 W	545 W	550 W
Power tolerance	0~+5 W	0~+5 W	0~+5 W	0~+5 W	0~+5 W
Module efficiency	20.51 %	20.70 %	20.89 %	21.09 %	21.28 %
Maximum power voltage (Vmp)	40.58 V	40.68 V	40.79 V	40.89 V	40.98 V
Maximum power current (Imp)	13.06 A	13.15 A	13.24 A	13.33 A	13.42 A
Open circuit voltage (Voc)	49.29 V	49.39 V	49.49 V	49.59 V	49.68 V
Short circuit current (Isc)	13.64 A	13.73 A	13.83 A	13.92 A	14.01 A

\*Standard Test Conditions: Irradiance: 1 000 W / m<sup>2</sup> • Cell temperature: 25°C • AM: 1.5

## ELECTRICAL DATA AT NMOT\*

Power output (Pmax)	395.18 W	398.91 W	402.64 W	406.37 W	410.10 W
Maximum power voltage (Vmp)	38.05 V	38.14 V	38.24 V	38.33 V	38.42 V
Maximum power current (Imp)	10.37 A	10.44 A	10.52 A	10.59 A	10.66 A
Open circuit voltage (Voc)	45.71 V	45.80 V	45.90 V	45.99 V	46.07 V
Short circuit current (Isc)	11.09 A	11.16 A	11.24 A	11.32 A	11.39 A

\*Nominal Operating Cell Temperature: Irradiance: 800 W / m<sup>2</sup> • Ambient temperature: 20°C  
• AM: 1.5 • Wind speed: 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline (182x91 mm)
Number of cells	144
Dimensions	2279x1134x35mm (1.5mm Cell Gap)
Weight	29 kg
Glass	3.2 mm tempered glass, High transmission (>94%), Anti-Reflective Coating
Frame	Anodized aluminium alloy
Junction box	IP68 rated (3 by pass diodes)
Cable	4.0mm <sup>2</sup> ; 300mm(+) / 300mm(-) ; Length can be customized
Connector	MC4 or MC4 compatible
Max front load (e.g.: snow)	5400 Pa
Max back load (e.g.: wind)	2400 Pa

## TEMPERATURE CHARACTERISTICS MAXIMUM RATINGS


NOCT	45°C ±2 °C
Temperature coefficient of Pmax	-0.35%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of Isc	+0.048%/°C

Operating temperature range	-40 °C ~+85 °C
Maximum system voltage	1500 DC (IEC)
Max series fuse rating	25 A


## PACKAGING (2279x1134x35mm)

Type	Pcs	Weight
Per Pallet	31 pcs	940 kg
40ft HQ Container	620 pcs (20 pallets)	18.80 t

## PV MODULE : ASP-540W-144M(M10)

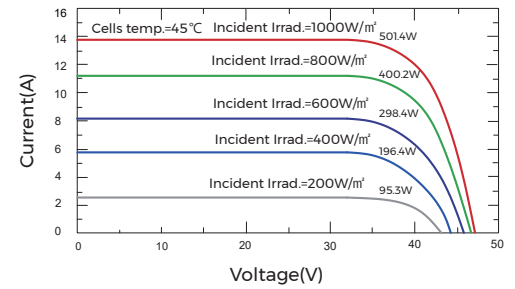

## PV MODULE : ASP-540W-144M(M10)

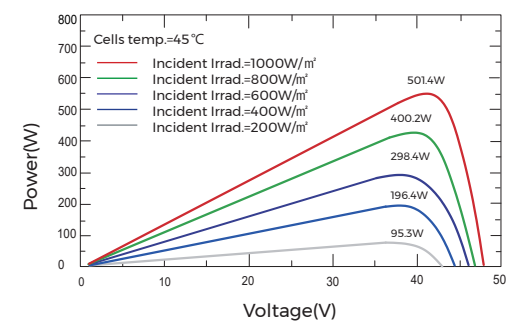

## Dimension of PV Module (mm)

